

CS 1110

Prelim 2 Review Spring 2021

Announcements

- Prelim 2 Thurs Apr 22 at 6:30 - 8pm (university-scheduled)
 - Your seat or Zoom link will be assigned this afternoon via CMS
 - In-person: Bring pens/pencils/erasers (bring several). Bring a watch or even an actual clock if you have one. No smart watches/phones! You may not be able to see the wall clock in Barton from your seat. Bring Cornell ID.
 - Online: *Different this time: log on to Zoom proctor session on both devices.* Students who have not done a mock exam (for Prelim 1) will be contacted to do one.
- Labs this week: Prelim 2 review, focus on class methods
- Thurs Apr 22 lecture time → office hours

Studying for the Exam

- Read study guide. Notes differences among the semesters
- Review all labs and assignments
 - You should be able to do all problems now
- Look at exams from past years
 - Exams with solutions on course web page
 - Refer to info in study guide regarding differences among the semesters

Prelim 2 Review

4

Prelim 2 Topics

- Topics after prelim 1:
 - Recursion now
 - Classes lab
- Topics before but not on prelim 1:
 - Nested lists now
 - Iteration with nested loops now
 - Dictionaries and tuples now

While-loop *not* on Prelim 2

Prelim 2 Review

5

Recursion: Before You Begin

- Plan out how you will approach the task before writing code
- Consider the following:
 - How can you “divide and conquer” the task?
 - Do you understand the spec?
 - How would you describe the implementation of the function using words?

Prelim 2 Review

6

Recursion

1. Base case
2. Recursive case
3. Ensure the recursive case makes progress towards the base case

Prelim 2 Review

7


Base Case

- Create cases to handle smallest units of data
- Depends on what type of data is being processed and what the function must do to that data

Prelim 2 Review

8

Base Case Examples

	Strings	Lists	Objects (see final example)
1 Element	"5"	[5]	 <pre> id3 value 5 left id2 right None </pre>
0 Elements	""	[]	None

Prelim 2 Review

9

Recursive Case

- Divide and conquer: how to divide the input so that we can call the function recursively on smaller input
- When calling the function recursively, assume that it works exactly as the specification states it does -- don't worry about the specifics of your implementation here
- Use this recursive call to handle the rest of the data, besides the small unit being handled

Prelim 2 Review

10

Make Progress

- Recursive calls must always make some sort of "progress" towards the base cases
- This is the only way to ensure the function terminates properly
- Risk having infinite recursion otherwise

Prelim 2 Review

11

Recursive Function (Fall 2017)

```
def filter(nlist):
```

```
    """Return: a copy of nlist with all negative numbers removed.
```

```
    The order of the original list is preserved
```

```
    Example: filter([1,-1,2,-3,-4,0]) returns [1,2,0]
```

```
    Precondition: nlist is a (possibly empty) list of numbers."""
```

Plan:

- Use divide-and-conquer to break up the list
- Filter each "half" and put back together

Prelim 2 Review

13

Recursive Function (Fall 2017)

```
def filter(nlist):
```

```
    """Return: a copy of nlist (in order) with negative numbers."""
```

```
    if len(nlist) == 0:
```

```
        return []
```

```
    elif len(nlist) == 1:
```

```
        return nlist[:] if nlist[0] >= 0 else [] # THIS does the work
```

```
    # Break it up into two parts
```

```
    left = filter(nlist[:1])
```

```
    right = filter(nlist[1:])
```

```
    # Combine
```

```
    return left+right
```

Prelim 2 Review

15

Recursive Function (Fall 2017)

```
def filter(nlist):
    """Return: a copy of nlist (in order) with negative numbers."""
    if len(nlist) == 0:
        return []

    # Do the work by removing one element
    left = nlist[1:]
    if left[0] < 0:
        left = []
    right = filter(nlist[1:])

    # Combine
    return left+right
```

Either approach works. Do what is easiest to you.

Prelim 2 Review

16

Recursive Function (Fall 2014)

```
def histogram(s):
    """Return: a histogram (dictionary) of the # of letters in string s.

    The letters in s are keys, and the count of each letter is the value. If
    the letter is not in s, then there is NO KEY for it in the histogram.

    Example: histogram("") returns {},
             histogram('abracadabra') returns {'a':5, 'b':2, 'c':1, 'd':1, 'r':2}

    Precondition: s is a string (possibly empty) of just letters."""
```

Plan:

- Use divide-and-conquer to break up the string
- Get two dictionaries back when you do
- Pick one and insert the results of the other

18

Dictionaries (Type dict)

```
>>> d = {'ec1':'Ezra', 'ec2':'Ezra', 'tm55':'Toni'}
>>> d['ec1']
'Ezra'
>>> d[0]
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
KeyError: 0
>>> d[:1]
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: unhashable type: 'slice'
>>>
```

Global Space

d id8

Heap Space

```
id8
dict
'ec1' 'Ezra'
'ec2' 'Ezra'
'tm55' 'Toni'
```

- Can access elements like a list
- Must use the key, not an index
- Cannot slice ranges

19

Recursive Function

```
def histogram(s):
    """Return: a histogram (dictionary) of the # of letters in string s."""
    if s == "":
        # Small data
        return {}

    # left = { s[0]:1}. No need to compute this
    right = histogram(s[1:])

    if s[0] in right:
        # Combine the answer
        right[s[0]] = right[s[0]]+1
    else:
        right[s[0]] = 1
    return right
```

Prelim 2 Review

21

Iteration with For-Loops

Two ways to implement the for-loop

for x in alist:

- x is each value inside the list
- Modifying x does not modify the list

for x in range(len(alist)):

- x represents each *index* of the list
- Modifying alist[x] modifies the list

Prelim 2 Review

22

Example with 2D Lists

```
def max_cols(table):
```

```
    """Returns: List storing max value of each column

    We assume that table is a 2D list of floats (so it is a list of rows and
    each row has the same number of columns. This function returns
    a new list that stores the maximum value of each column.)

    Examples:
        max_cols([ [1,2,3], [2,0,4], [0,5,2] ]) is [2,5,4]
        max_cols([ [1,2,3] ]) is [1,2,3]

    Precondition: table is a NONEMPTY 2D list of floats
    Built-in function max not allowed. """
```

Prelim 2 Review

23

Example with 2D Lists

```
def max_cols(table):
    """Returns: List storing max value of each column
    Precondition: table is a NONEMPTY 2D list of floats"""
    # Use the fact that table is not empty
    result = table[0][:] # Make a copy, do not modify table
    # Loop through rows, then loop through columns
    for row in table:
        for k in range(len(row)):
            if row[k] > result[k]:
                result[k] = row[k]
    return result
```

Prelim 2 Review

25

Questions? Next up: Office Hours




Prelim 2 Review

26


Recursion with Objects

```
class TreeNode(object):
    """Attributes:
    value: An int, the "value" of this TreeNode object
    left: A TreeNode object, or None
    right: A TreeNode object, or None"""
```



27

Understanding the Object's Structure

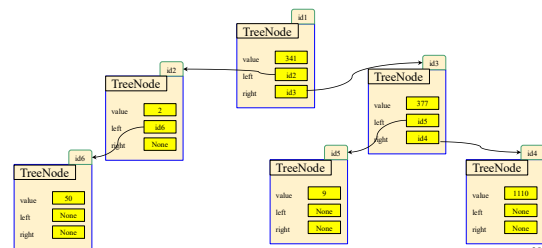

28

Recursion with Objects

```
def contains(t, v):
    """
    Return: True if any of the TreeNode objects in the entire "tree" have the value v
    Define the "tree" as the TreeNode t, as well as the TreeNodes accessible
    through the left and right attributes of t (if not None)
    Preconditions: t is a TreeNode, or None. v is an int.
    """
```

29

Recursion with Objects

```
def contains(t, v):
    """
    Return: True if any of the TreeNode objects in the entire "tree" have the value v
    Define the "tree" as the TreeNode t, as well as the TreeNodes accessible
    through the left and right attributes of t (if not None)
    Preconditions: t is a TreeNode, or None. v is an int.
    """
    if t is None: # Case: None/non-existent Tree
        return False
    elif t.value == v: # Case: Found value
        return True
    # Now what?
```


30

Divide and Conquer on Trees

Recall the tree structure...

They can be easily divided into left and right subtrees!

Recursion on left
Recursion on right
Put result back together



31

Recursion with Objects

```
def contains(t, v):
```

```
"""
```

```
Return: True if any of the TreeNode objects in the entire "tree" have the value v
```

```
Define the "tree" as the TreeNode t, as well as the TreeNodes accessible through the left and right attributes of t (if not None)
```

```
Preconditions: t is a TreeNode, or None. v is an int.
```

```
"""
```

```
if t is None: # Case: None/non-existentTree
```

```
| return False
```

```
elif t.value == v: # Case: Found value
```

```
| return True
```

```
# Here need to check t.left subtree and t.right subtree
```

```
left_result= contains(t.left, v)
```

```
# Recursively check branches
```

```
right_result= contains(t.right, v)
```

```
return left_result or right_result # Combining two bools
```

What is the type of t.left and t.right?

What happens if t.left or t.right is None?

32